

Rept: 4-A-E

# South Carolina

5/30/2023 1:05:32 PM

## Department Of Transportation Road Summary Report By Contract

---

ContractNbr: 20236008	ProposalId: 1866520	Sub Ind: S	Exp Ind: E
-----------------------	---------------------	------------	------------

---

FileNbr: 18.041502	County: Dorchester
--------------------	--------------------

<u>Miles</u>	<u>Route</u>	<u>From</u>	<u>To</u>
15.38	I-0095	( 68.81)Colleton County Line	( 84.19).16 Mi N of Duncan Chapel Rd
15.38	←-----Total Mileage for FileNbr-----		18.041502

---

15.38 ←-----Total Mileage for ContractNbr-----	20236008
--	----------

---



Rept: 4-8-E

**South Carolina**

5/30/2023 1:04:51 PM

**Department Of Transportation  
Item Quantities Summary By File**

FileNbr: 18.041502

Total Length(Mi): 15.38

Submit Indicator: S

Cnty: Dorchester

ProjectId: P041502

Export Indicator: E

Contract: 20236008

ProposalId: 1866520



<u>Item #</u>	<u>Item Description</u>	<u>Unit</u>	<u>Qty</u>
1031000	MOBILIZATION	LS	1.000
1032010	BONDS AND INSURANCE	LS	1.000
1055102	CROSS SLOPE VERIFICATION	LS	1.000
1071000	TRAFFIC CONTROL	LS	1.000
1071504	LAW ENFORCMT. OFFICER	HR	1,500.000
2033000	BORROW EXCAVATION	CY	12,304.000
2035100	EXCAVATION FOR SHOULDER PAVING	STA	1,624.128
2072000	HAULING OF EXCAVATED SHLDR MTR	STA	1,624.128
3104000	HMA SHOULDER WIDENING COURSE	TON	21,655.041
4011004	LIQUID ASPHALT BINDER PG64-22	TON	8,845.830
4011008	LIQUID ASPHALT BINDER PG76-22	TON	4,475.375
5013200	MILLING EXISTING CONCRETE PAV. 2.0"	SY	5,520.000
5013400	MILLING EXISTING CONCRETE PAV. 4.0"	SY	162,389.297
5013990	MILL.EXIST.CONC PVMT.-VARIABLE	SY	88,342.219
4019000	MILLED-IN RUMBLE STRIP	MILE	61.520
4020320	HMA.INTERMEDIATE CR.TYPE B	TON	72,183.469
4030290	SMA SURFACE COURSE - 9.5 MM	TON	72,183.469
4030360	H/M ASPH.SURF.CR. TYPE E	TON	32,482.561
4112321	W/M ASPH.INTER CR.TYPE B-SPECI	TON	32,477.869
5021025	F.D.CONC.PAVT.PATCH-10"	SY	30,000.000
6021120	PERM.CONST.SIGNS(GRND.MNTD)	SF	580.000
6062000	C.Z.CHANGE.MESS.SGN(TRAIL.MTD)	EA	4.000
6250007	6"WH.BRKN.LINE-GAP EX-F.D.PNT.	LF	124,210.000
6250012	6"WH.SLD.LINE-PVT.EDGE-F.D.PNT	LF	515,655.000
6250020	12"WH.SLD LNE-F.D.PNT	LF	22,530.000
6250111	6"YEL.SLD LNE-PVT EDGE-F.D.PNT	LF	515,655.000
6271007	6" WH.BRKNLINE THERMO -90 MIL.	LF	41,403.000
6271012	6" WH SLD LNE PVT EL TH-90 ML	LF	171,885.000
6271020	12" WH.SLDLNES THERMO-125 MIL.	LF	7,510.000
6271076	6"YEL.SLD.LNES.- THERMO. 90MIL	LF	171,885.000
6302001	PER.RD/C.PAV.MARK BIDIR 4"X4"	EA	2,030.000
6319505	REMOVAL OF PAVEMENT MARKINGS	LF	10,837.500
6351107	PREF.PMT.MRK(T-1)8"WH.CONT.BRK	LF	1,300.000
6351155	PREF.PVMT.MARK(T-1)6"WH.SOLID	LF	4,770.000
6351460	PREF.PVMT.MARK(T-1)6"YEL.SOLID	LF	4,770.000
8100102	PERM. GRASS FOR NON-PERMIT RESUR	ACRE	44.660

No Records available.

TYPICAL SECTION OF IMPROVEMENT  
 SOUTH CAROLINA DEPARTMENT OF TRANSPORTATION  
 COLUMBIA, SC


DESIGN REFERENCE FOR THESE PLANS IS THE:  
**2021**  
 SCDOT ROADWAY DESIGN MANUAL

I-95  
 CONSTRUCTION

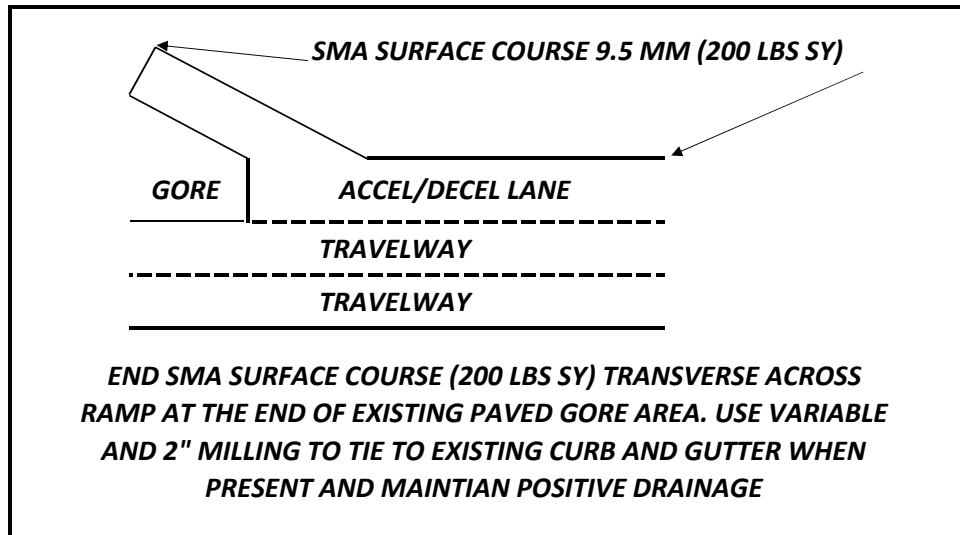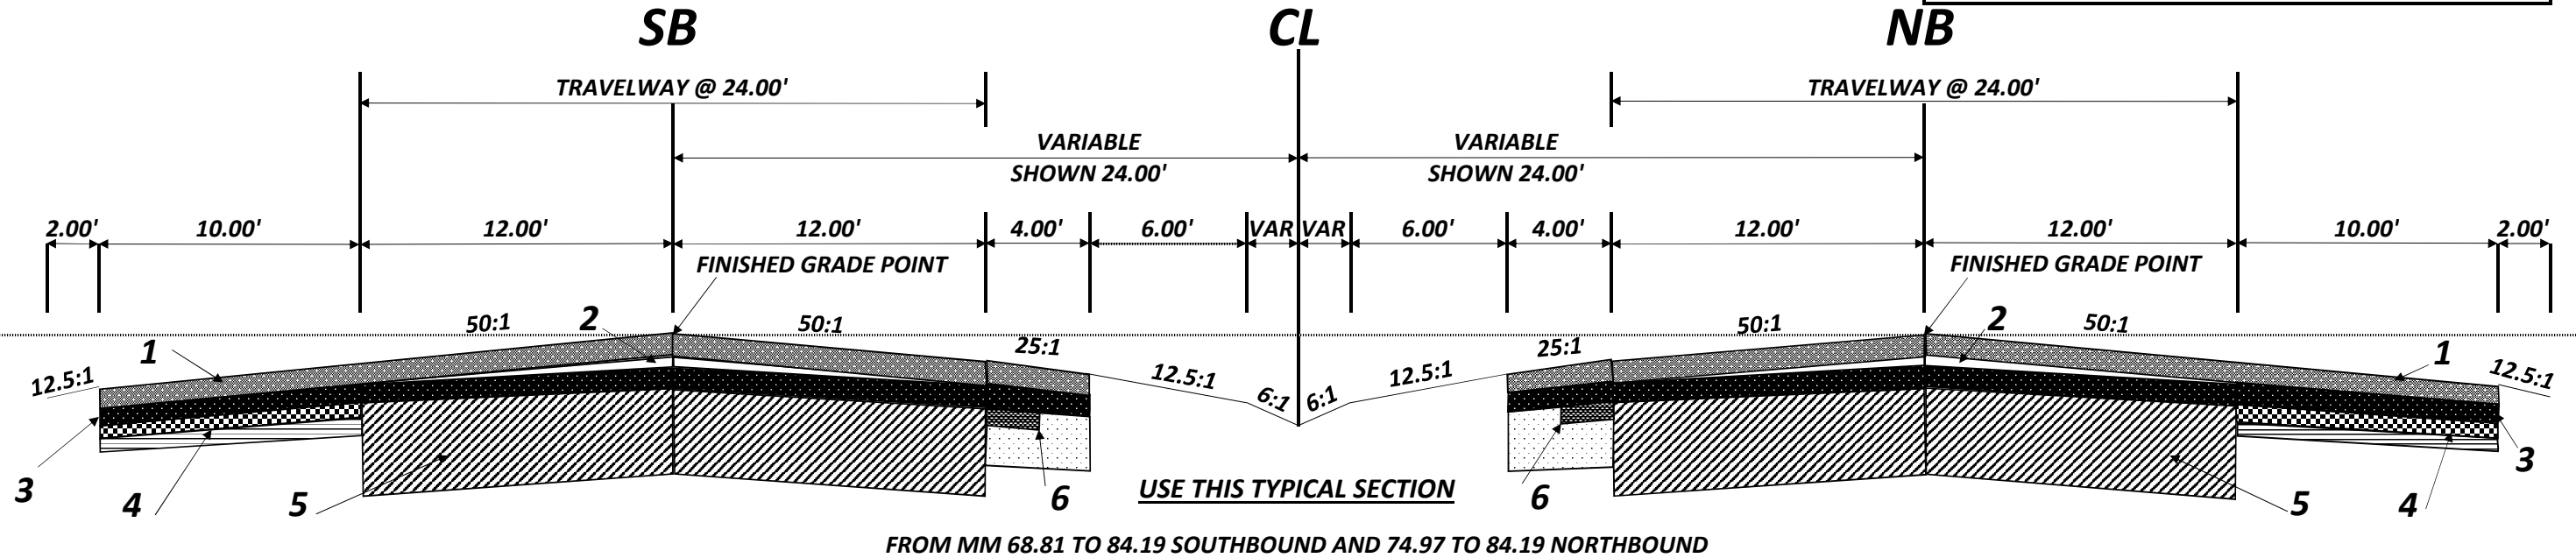

FINAL BRIDGE CLEARANCES SHALL BE 16.0' OR GREATER FROM SHOULDER TO SHOULDER

PERFORM FULL DEPTH CONCRETE PATCH IN MAINLINE AS NECESSARY

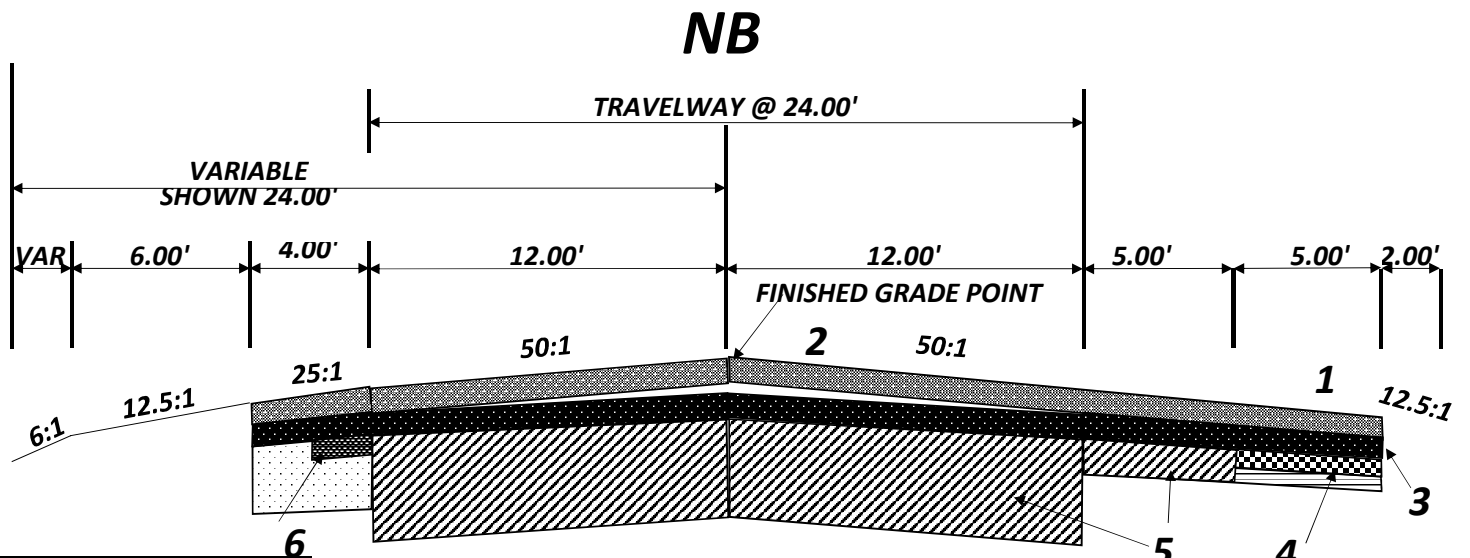

USE THIS TYPICAL SECTION  
 FROM MM 68.81 TO 74.97 NORTHBOUND ONLY

- |   |  |  |
|---|--|--|
| 1 |  | SMA SURFACE COURSE 9.5 MM (200 LBS SY)   |
| 2 |  | SURFACE COURSE TYPE E  |
| 3 |  | INTERMEDIATE COURSE TYPE B (200 LBS SY)  |
| 4 |  | REMOVE AND REPLACE EXISTING ASPHALT AND SUBGRADE WITH ITB SPECIAL (400 LBS SY)           |
| 5 |  | RETAIN EXISTING CONCRETE   |
| 6 |  | REMOVE AND REPLACE EXISTING ASPHALT AND SUBGRADE WITH SHOULDER WIDENING MIX (600 LBS SY) |



Rept: 4-7-E1

**South Carolina**  
**Department Of Transportation**  
**Individual Section Summary**

5/30/2023 1:04:19 PM

<b>Road:</b> I-95	<b>Road Name:</b> I-95 NB	<b>FileNbr:</b> 18.041502
<b>County:</b> Dorchester	<b>Total Length(Mi):</b> 15.38	<b>ProjectId:</b> P041502
<b>Submit Indicator:</b> S	<b>Export Indicator:</b> E	<b>ContractId:</b> 20236008
		<b>ProposalId:</b> 1866520

<b>SectionKey:</b> 18I-00950003	<b>ADT:</b> 20000
<b>From Route:</b> Colleton County Line	<b>To Route:</b> .16 Mi N of S-11
<b>BMP:</b> 68.81	<b>EMP:</b> 84.19
	<b>Miles:</b> 15.38
<b>OrigWidth:</b> 76	<b>WidenLeft:</b> 2
	<b>WidenRight:</b> 2
	<b>Final Width:</b> 80
<b>Intersections:</b> 0	<b>CommDrwy:</b> 0
	<b>ResDrwy:</b> 0
	<b>PQI:</b> 3.00

	<u>Surface</u>	<u>Inter</u>	<u>Drwys</u>	<u>Intermed</u>	<u>Level</u>	<u>Widen</u>
Rate:	---	---	---	---	---	---
Type:	4011008	---	---	4011004	4011004	4011004
Qty:	4,475.375	0.000	0.000	3,897.907	3,865.171	1,082.752
Rate:	200	---	---	200	---	1200
Type:	4030290	---	---	4020320	4030360	3104000
Qty:	72,183.469	0.000	0.000	72,183.469	32,482.561	21,655.041
Rate:	---	---	---	---	---	---
Type:	---	---	---	---	4112321	---
Qty:	0.000	0.000	0.000	0.000	32,477.869	0.000

<u>Item #</u>	<u>Item Description</u>	<u>Quantity</u>	<u>Unit</u>
1031000	MOBILIZATION	1.000	LS
1032010	BONDS AND INSURANCE	1.000	LS
1055102	CROSS SLOPE VERIFICATION	1.000	LS
1071000	TRAFFIC CONTROL	1.000	LS
1071504	LAW ENFORCMT. OFFICER	1,500.000	HR
2033000	BORROW EXCAVATION	12,304.000	CY
2035100	EXCAVATION FOR SHOULDER PAVING	1,624.128	STA
2072000	HAULING OF EXCAVATED SHLDR MTR	1,624.128	STA
3104000	HMA SHOULDER WIDENING COURSE	21,655.041	TON
4011004	LIQUID ASPHALT BINDER PG64-22	8,845.830	TON
4011008	LIQUID ASPHALT BINDER PG76-22	4,475.375	TON
5013200	MILLING EXISTING CONC PAV. 2.0"	5,520.000	SY
5013400	MILLING EXISTING CONC PAV. 4.0"	162,389.297	SY
5013990	MILL.EXIST.CONC .PVMT.-VARIABLE	88,342.219	SY
4019000	MILLED-IN RUMBLE STRIP	61.520	MILE
4020320	HMA.INTERMEDIATE CR.TYPE B	72,183.469	TON
4030290	SMA SURFACE COURSE - 9.5 MM	72,183.469	TON
4030360	H/M ASPH.SURF.CR. TYPE E	32,482.561	TON
4112321	W/M ASPH.INTER CR.TYPE B-SPECI	32,477.869	TON
5021025	F.D.CONC.PAVT.PATCH-10"	30,000.000	SY
6021120	PERM.CONST.SIGNS(GRND.MNTD)	580.000	SF
6062000	C.Z.CHANGE.MESS.SGN(TRAIL.MTD)	4.000	EA
6250007	6"WH.BRKN.LINE-GAP EX-F.D.PNT.	124,210.000	LF
6250012	6"WH.SLD.LINE-PVT.EDGE-F.D.PNT	515,655.000	LF
6250020	12"WH.SLD LNE-F.D.PNT	22,530.000	LF
6250111	6"YEL.SLD LNE-PVT EDGE-F.D.PNT	515,655.000	LF
6271007	6" WH.BRKNLINE THERMO -90 MIL.	41,403.000	LF
6271012	6" WH SLD LNE PVT EL TH-90 ML	171,885.000	LF
6271020	12" WH.SLDLNES THERMO-125 MIL.	7,510.000	LF
6271076	6"YEL.SLD.LNES.- THERMO. 90MIL	171,885.000	LF
6302001	PER.RD/C.PAV.MARK BIDIR 4"X4"	2,030.000	EA
6319505	REMOVAL OF PAVEMENT MARKINGS	10,837.500	LF
6351107	PREF.PMT.MRK(T-1)8"WH.CONT.BRK	1,300.000	LF
6351155	PREF.PVMT.MARK(T-1)6"WH.SOLID	4,770.000	LF
6351460	PREF.PVMT.MARK(T-1)6"YEL.SOLID	4,770.000	LF
8100102	PERM. GRASS FOR NON-PERMIT RES	44.660	ACRE

**AA1 - Alternate 1****TWld****AA2 - Alternate 2****TWld**

---

**Special Provisions:****Seq   Details**

0001   Pay items for EXCAVATION FOR SHOULDER PAVING and HAULING OF EXCAVATED SHLDR MTR are included and to be paid for the inside shoulder 4' paving area only.