


TYPICAL SECTIONS OF IMPROVEMENT

Scale 1" = 5'

USE THIS SECTION THRUOUT MAIN LINE

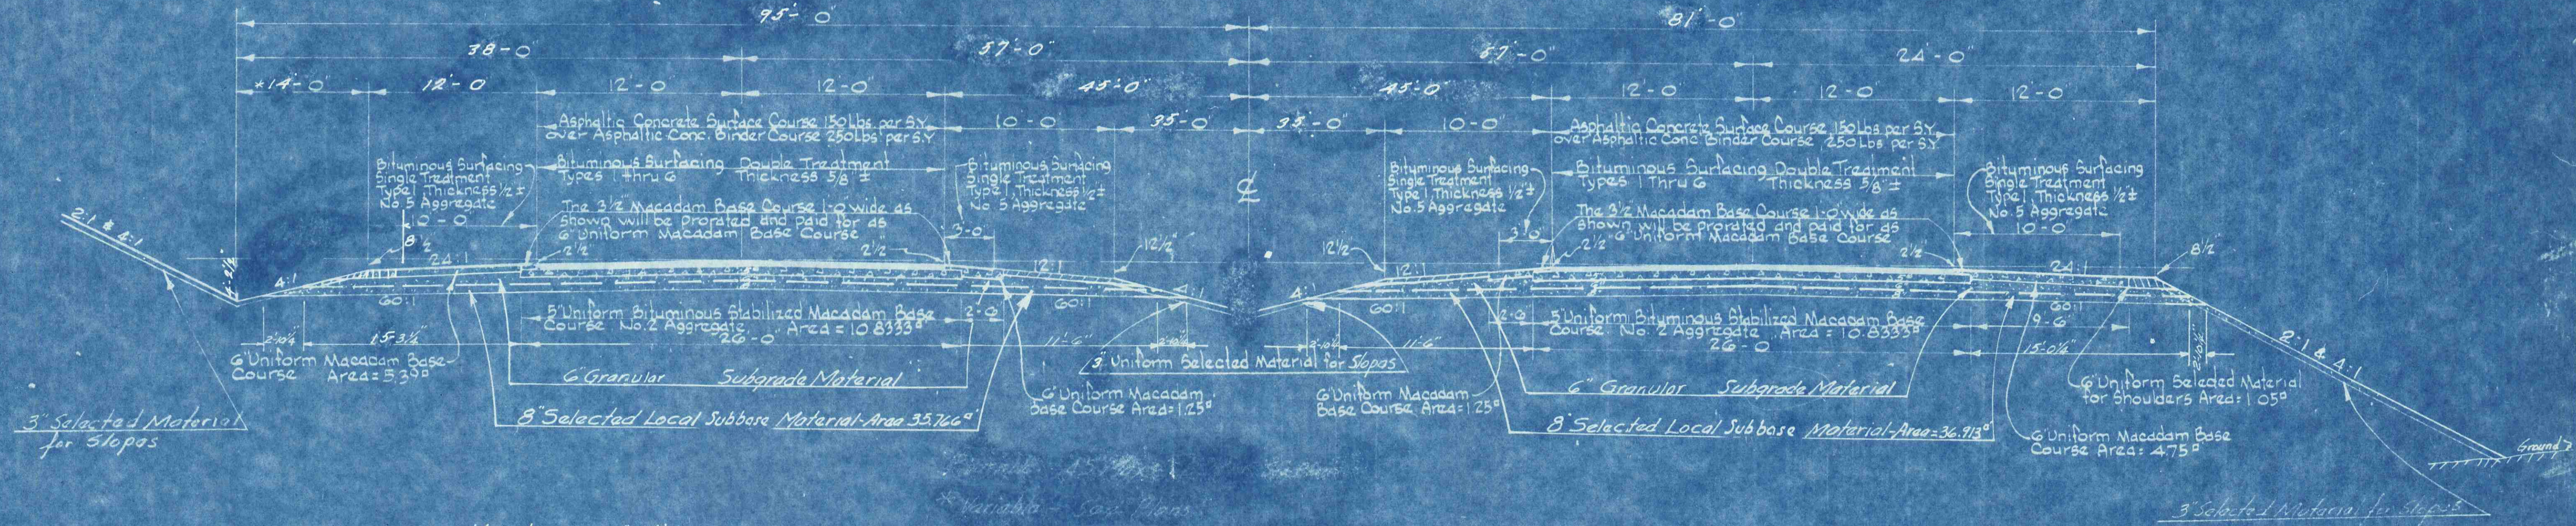

* Variable shown 14" Min.

USE THIS SECTION MAIN LINE
See Sheet No 2-C

Note:-
Only Grading, Draining and placing Selected Local Subbase Material shall be performed under this Contract. The Local Subbase Material shall be placed only within that area as shown below dashed line on the Typical Section.

NOTE:-
All material authorized to be stripped or removed from the roadway will be paid for as unclassified excavation in accordance with Section 13 of the Standard Specifications.
A sufficient quantity of the material, shown by the plans to be stripped or removed from the roadway, that is suitable slope or shoulder material, shall be stockpiled and later placed on the slopes and shoulders. Excess material, stripped or removed from the roadway, that is not suitable for slope or shoulder material, shall be disposed of by the Contractor, as directed by the Engineer, in accordance with Section 13 of the Specifications.
Material that is stockpiled and later placed on slopes or shoulders will be measured and paid for in accordance with Sections 21 F1 & 21 G of the Standard Specifications.

Note:-
Attention is called to the fact that Clearing and Grubbing shall not be performed in the Median between the inside toe of fills of the North and South Bound Lanes, except necessary thinning and removal of underbrush as will be designated by the Engineer. The Contractor shall use extreme caution to preserve the trees and shrub growth within this Area.