7415 Lindsey Road
Little Rock, AR 72206
501-490-4242

South Carolina Department of Transportation

ACCEPTED

☐ AS NOTED

REVIEWED BY: John Egan 5/7/25
DATE

Project: OH-12 SIGNS

CUTOMER PO #: EMAIL

Extrusion Signs: BK1

County: VARIOUS

SC

INFRASTRUCTURE CONSULTING & ENGINEERING

SHOP DRAWING REVIEW

REVIEW IS FOR GENERAL COMPLIANCE WITH CONTRACT DOCUMENTS. NO RESPONSIBILITY IS ASSUMED FOR CORRECTNESS OF DIMENSIONS OR DETAILS.

APPROVED	☒
APPROVED AS NOTED	☐
REVISE AND RESUBMIT	☐
REJECTED	☐

BY: KAG DATE: 4/03/25

Interstate SignWays Job #: 6259
Drawings Prepared For: ARCHER UNITED JOINT VENTURE

Drawn By: Troyer Xaiyasang

Checked for Submittal: 03/24/2025
Sign Square Footage Total For This Book: 812.00

SOUTH CAROLINA

OVERHEAD MOUNTED EXTRUSION TYPICAL

PANELS – 6” and 12” extruded aluminum panels. 6” panel, when required, shall be placed on the top of the sign. Assemble panels on 12” centers.

PANEL BOLT – Bolt - 3/8” – 16 x 3/4” Hex Head. Alloy 2024 -T4. Part (4006101010)
Washer – 3/8” flat. Alloy Alclad 2024 – T4. Part (4206101010)
Nut - 3/8” – 16 Hex. Alloy 6061 – T6. Part (4306101040)

POST CLIP – Clip - Alloy 356 – T6. Part (4701001005)
Bolt - 3/8” – 16 x 1 3/4” Rectangular Head. Alloy 2024 -T4. Part (4006102145)
Washer – 3/8” flat. Alloy Alclad 2024 – T4. Part (4206101010)
Nut – 3/8” – 16 Locknut. Alloy 2017 – T4. Part (4306102025)

EDGE TRIM – Not required

DECALS – Required. See attached detail.

DEMOUNTS AND LEGEND – Direct applied unless otherwise stated.

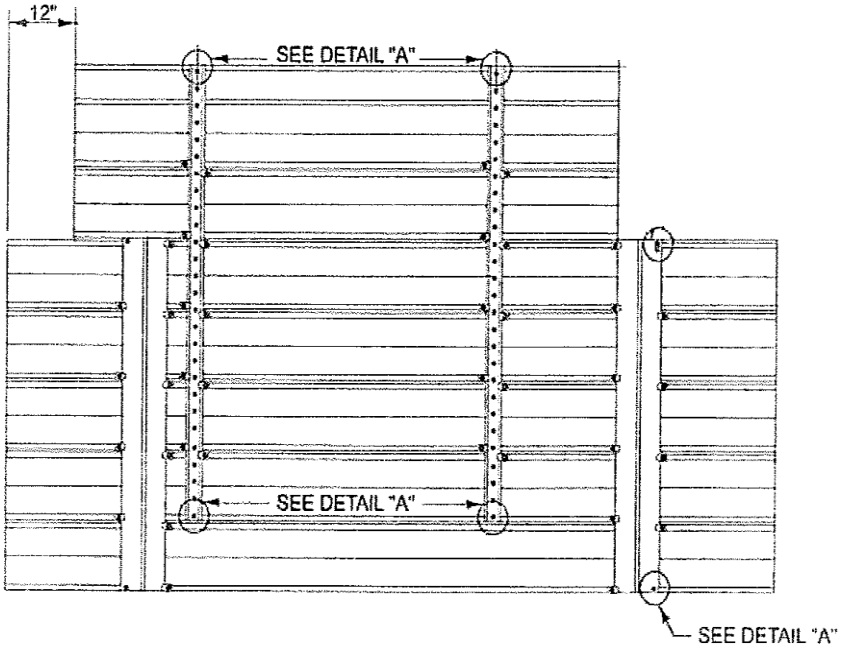



OVERHEAD ONLY

PACK AND SHIP HARDWARE:
(4) EA FOR SIGN WITH OUT EXIT HAT.
(8) EACH FOR SIGN WITH EXIT HAT.

BOLT – 3/8” X 1 1/4" RCT HEAD
PART (4006102050)

WASHER – 3/8” 2024 FLAT
PART (4206101010)

NUT – 3/8” HEX LOCKNUT
PART (4306102025)

Special Note: All exit hats on overheads must offset 12” from the end of the parent sign.

ALL INFORMATION ON THIS SHEET HAS BEEN OBTAINED FROM SCDOT STANDARD SPECS. (2007) AND STANDARD DRAWINGS FOR ROAD CONSTRUCTION (2011).

SOUTH CAROLINA

DECALS
OVERHEAD MOUNTED

All Multiple Panel Signs shall have identification numbers stenciled on the back. These numbers shall correspond with the sign numbers used in the plans (ex. Q-52) and shall be two (2) inches high. Include in the decal in one (1) inch (min.) copy, the date of manufacture (Month/Year), sheeting brand and type (ex. 3M TYPE III), and an imprint to identify the manufacturer of the sign (ex. IHS). The decal shall be placed approximately ten (10) inches from the bottom of the sign and approximately twelve (12) inches from the left side, as viewed from the back.

NOTE: SEE BELOW FOR SHEETING BRAND AND TYPE IDENTIFICATION BREAK DOWN

3M Company Sheeting Designations

DG3 (4090 Series) = 3M TYPE T
D.G. (3940 Series) = 3M TYPE VIII
393 (3930 Series) = 3M TYPE III
VIP (3990 Series) = 3M TYPE IX
S/CAL = 3M S/CAL

Avery Dennison Company Sheeting Designations

AD5 (T-5500 Series) = AVERY TYPE III
AD6 (T-6500 Series) = AVERY TYPE III
AD9 (T-9500 Series) = AVERY TYPE IX
AD7 (T-7500 Series) = AVERY TYPE VIII

DECAL PLACEMENT

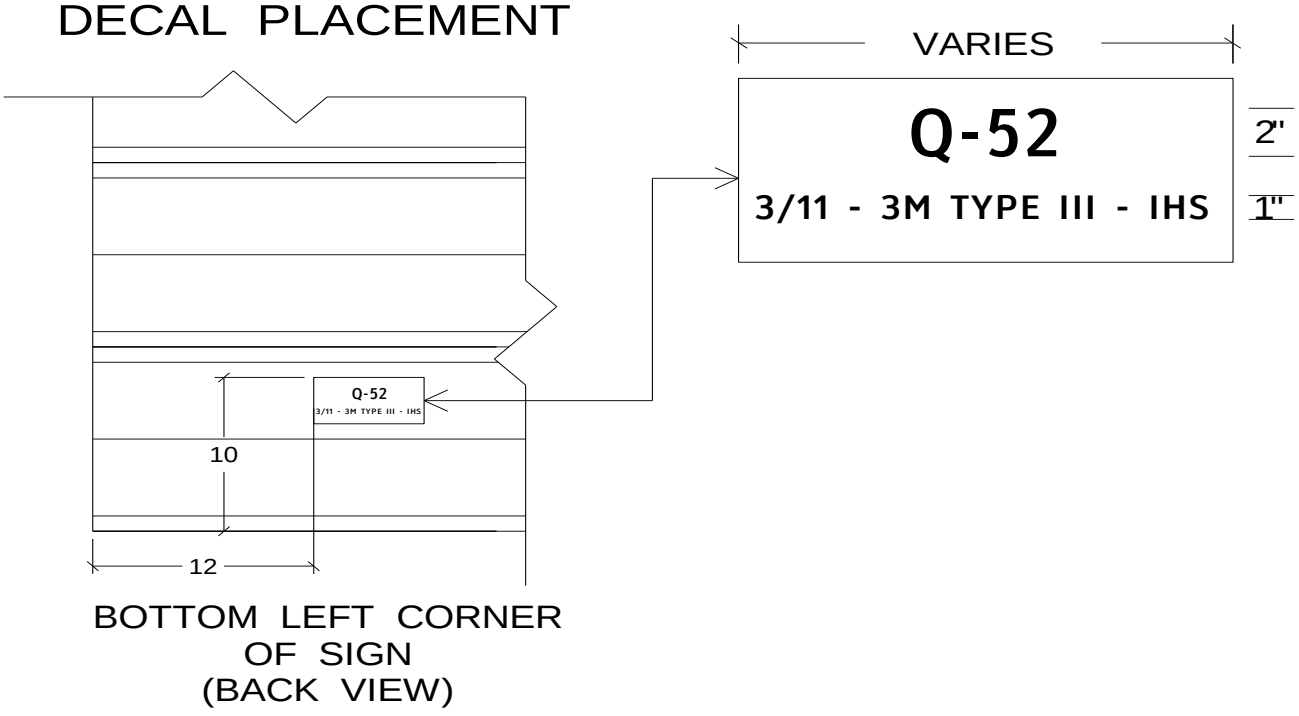

BOTTOM LEFT CORNER
OF SIGN
(BACK VIEW)

Job Number:	6259	Sign #:	OH-12	Break 1	78	Sign Type:	X	V Break	312.00	Interstate Highway Sign Corp.	
State:	SC	Sheet #:	A01	Break 2		Book #:	1			7415 Lindsey Road	
Item:	6520250	Quantity:	1	Post Clip Qty	360	Wind Zone:				Little Rock, AR 72206	
Project:	OH-12 SIGNS	Supports:	10			Sign Width:	576.00			Phone#	(501) 490-4242
County:	VARIOUS	Mounting:	OH	Org. Date	3/24/25	Sign Height:	198.00			Email:	txaiyasang@interstatesigns.com
Customer:	ARCHER UNITED JOINT VENT	Attach To:		Mod. Date		Sq. Ft.:	792.00			Drawn By:	Troyer Xaiyasang



Legend Type : TYPE 11/DG3;
Background Type : TYPE 11/DG3;
Border Type : TYPE 11/DG3;
Supports : 2;
Mounting : OE;
Attach to : A01;
Drawn by : Troyer;
3.0" Radius, 1.0" Border, White on, Green;
"EXIT", E specified length; "110", E specified length;

Legend Type : TYPE 11/DG3;
Background Type : TYPE 11/DG3;
Border Type : TYPE 11/DG3;
Supports : 10;
Mounting : OH;
Drawn by : Troyer;
12.0" Radius, 2.0" Border, White on, Green;
Interstate 26 20.0" D; "E", E specified length; "AST", E specified length; "Charleston", E Mod specified length;

12.0" Radius, 2.0" Border, White on, Green;
"Lexington", E Mod specified length; "West", E Mod specified length; "Columbia", E Mod specified length;

12.0" Radius, 2.0" Border, White on, Green;
thru-right arrow;

12.0" Radius, 2.0" Border, White on, Green;
"¼", E specified length; "MILE", E specified length;
Table of letter and object lefts

E 11.6	X 21.0	I 31.7	T 35.5	1 55.3	1 63.6	O 72.0

132.1	E 198.1	A 211.0	S 225.5	T 237.5

C 122.1	h 140.3	a 155.6	r 172.0	l 183.7	e 191.8	s 205.4	t 218.8	o 230.5	n 246.1	

82.5

L 52.3	e 67.5	x 81.5	i 98.7	n 108.0	g 123.3	t 138.2	o 149.9	n 165.5	

W 18.4	e 39.2	s 53.0	t 66.4	C 94.4	o 111.5	l 127.1	u 136.4	m 152.9	b 176.2	i 191.4	a 199.5		

34.7	178.7	322.7

¼ 0.0	M 31.0	I 42.8	L 47.1	E 56.5

Job Number:	6259	Sign #:	OH-12E	Break 1		Sign Type:	X	V Break	Interstate Highway Sign Corp.
State:	SC	Sheet #:	A01E	Break 2		Book #:	1		7415 Lindsey Road
Item:	6520250	Quantity:	1	Post Clip Qty	16	Wind Zone:			Little Rock, AR 72206
Project:	OH-12 SIGNS	Supports:	2			Sign Width:	96.00		Phone# (501) 490-4242
County:	VARIOUS	Mounting:	OE	Org. Date	3/24/25	Sign Height:	30.00		Email: txaiyasang@interstatesigns.com
Customer:	ARCHER UNITED JOINT VENT	Attach To:	A01	Mod. Date		Sq. Ft.:	20.00		Drawn By: Troyer Xaiyasang

EXIT HAT DETAILS ARE ON THE PREVIOUS PAGE.