

** EDGE OF PAVEMENT DISTANCE. **
MAY VARY SOMEWHAT DEPENDING
ON LOCATION OF OTHER UTILITY
PLACEMENTS AND POSSIBLE
OBSTRUCTIONS.

** SPECTRUM WILL MAINTAIN **
48" DEPTH UNDER ROADWAY
AND 42" DEPTH BELOW THE
LOWEST DRAINAGE STRUCTURE
AND GROUND LEVEL

* ROW INFO OBTAINED FROM
SCDOT PLANS ONLINE:
FILE NO: 32.700, SHEET #17-19

** SPECTRUM WILL PLACE **
HDPE CONDUIT WITH A
DIAMETER OF 1 1/4" TO 2"
DEPENDING ON TYPE OF
CABLE OR FIBER.

** DRY MISSILE BORE PITS **
TO BE PLACED EVERY 20-40 FEET
DEPENDING ON SOIL CONDITIONS.

** SPECTRUM TO PLACE **
UNDERGROUND FACILITIES
AT THE BACK SIDE OF THE ROAD
RIGHT OF WAY AS FAR AS POSSIBLE.


** INTERSTATE 20 **
CONTROLLED ACCESS

** SPECTRUM TIE POINT **
IS APPROXIMATELY
330 FEET OR .063 MILES
NORTHEAST OF BUSH RIVER RD.
(S-32-273)

3			REVISION #2
2			REVISION #1
1	10/10/19	AVN	ORIGINAL
NO.	DATE	DRAFTER	COMMENT


1. Total cable footage is 624 ft. or .118 miles
2. Underground cable to be a minimum of 5' off EOP unless otherwise noted and 3 ft below crossline pipes.
3. Pedestal to be placed at edge of Right-of-Way
4. Bore under all roads
5. Bore pits must be closed immediately after installation
6. Bore pits must be 5 ft. from edge of pavement
7. Shoulder sod destroyed by this installation to be replaced and this entire disturbed area reshaped and rolled to the cross section existing prior to this work.
8. Trench to be properly backfilled and thoroughly tamped. The disturbed area shall be reshaped and dressed out in a workmanship-like manner.
9. The permittee shall be responsible for any and all damages that occur as a direct result of this installation.
10. Permittee shall allow for any embankment areas near road pavement by making sure cable is at all times at least 42' depth under pavement.

LEGEND	
	PEDESTAL
	VAULT
	UTILITY POLES
	SCDOT R.O.W.
	COUNTY R.O.W.
	DITCH LINE
	BUSH OR TREE



3347 Platt Springs Road
West Columbia, SC 29170
PHONE (803) 744-5595

SCALE: 1:40	APPROVED BY: 113 EXECUTIVE POINTE BLVD COMMERCIAL - MIKE KOWALEWSKI	DRAFTED BY: TELICS
LEXINGTON SCDOT STATE ROADS		DRAWING NUMBER TWC-9175-01

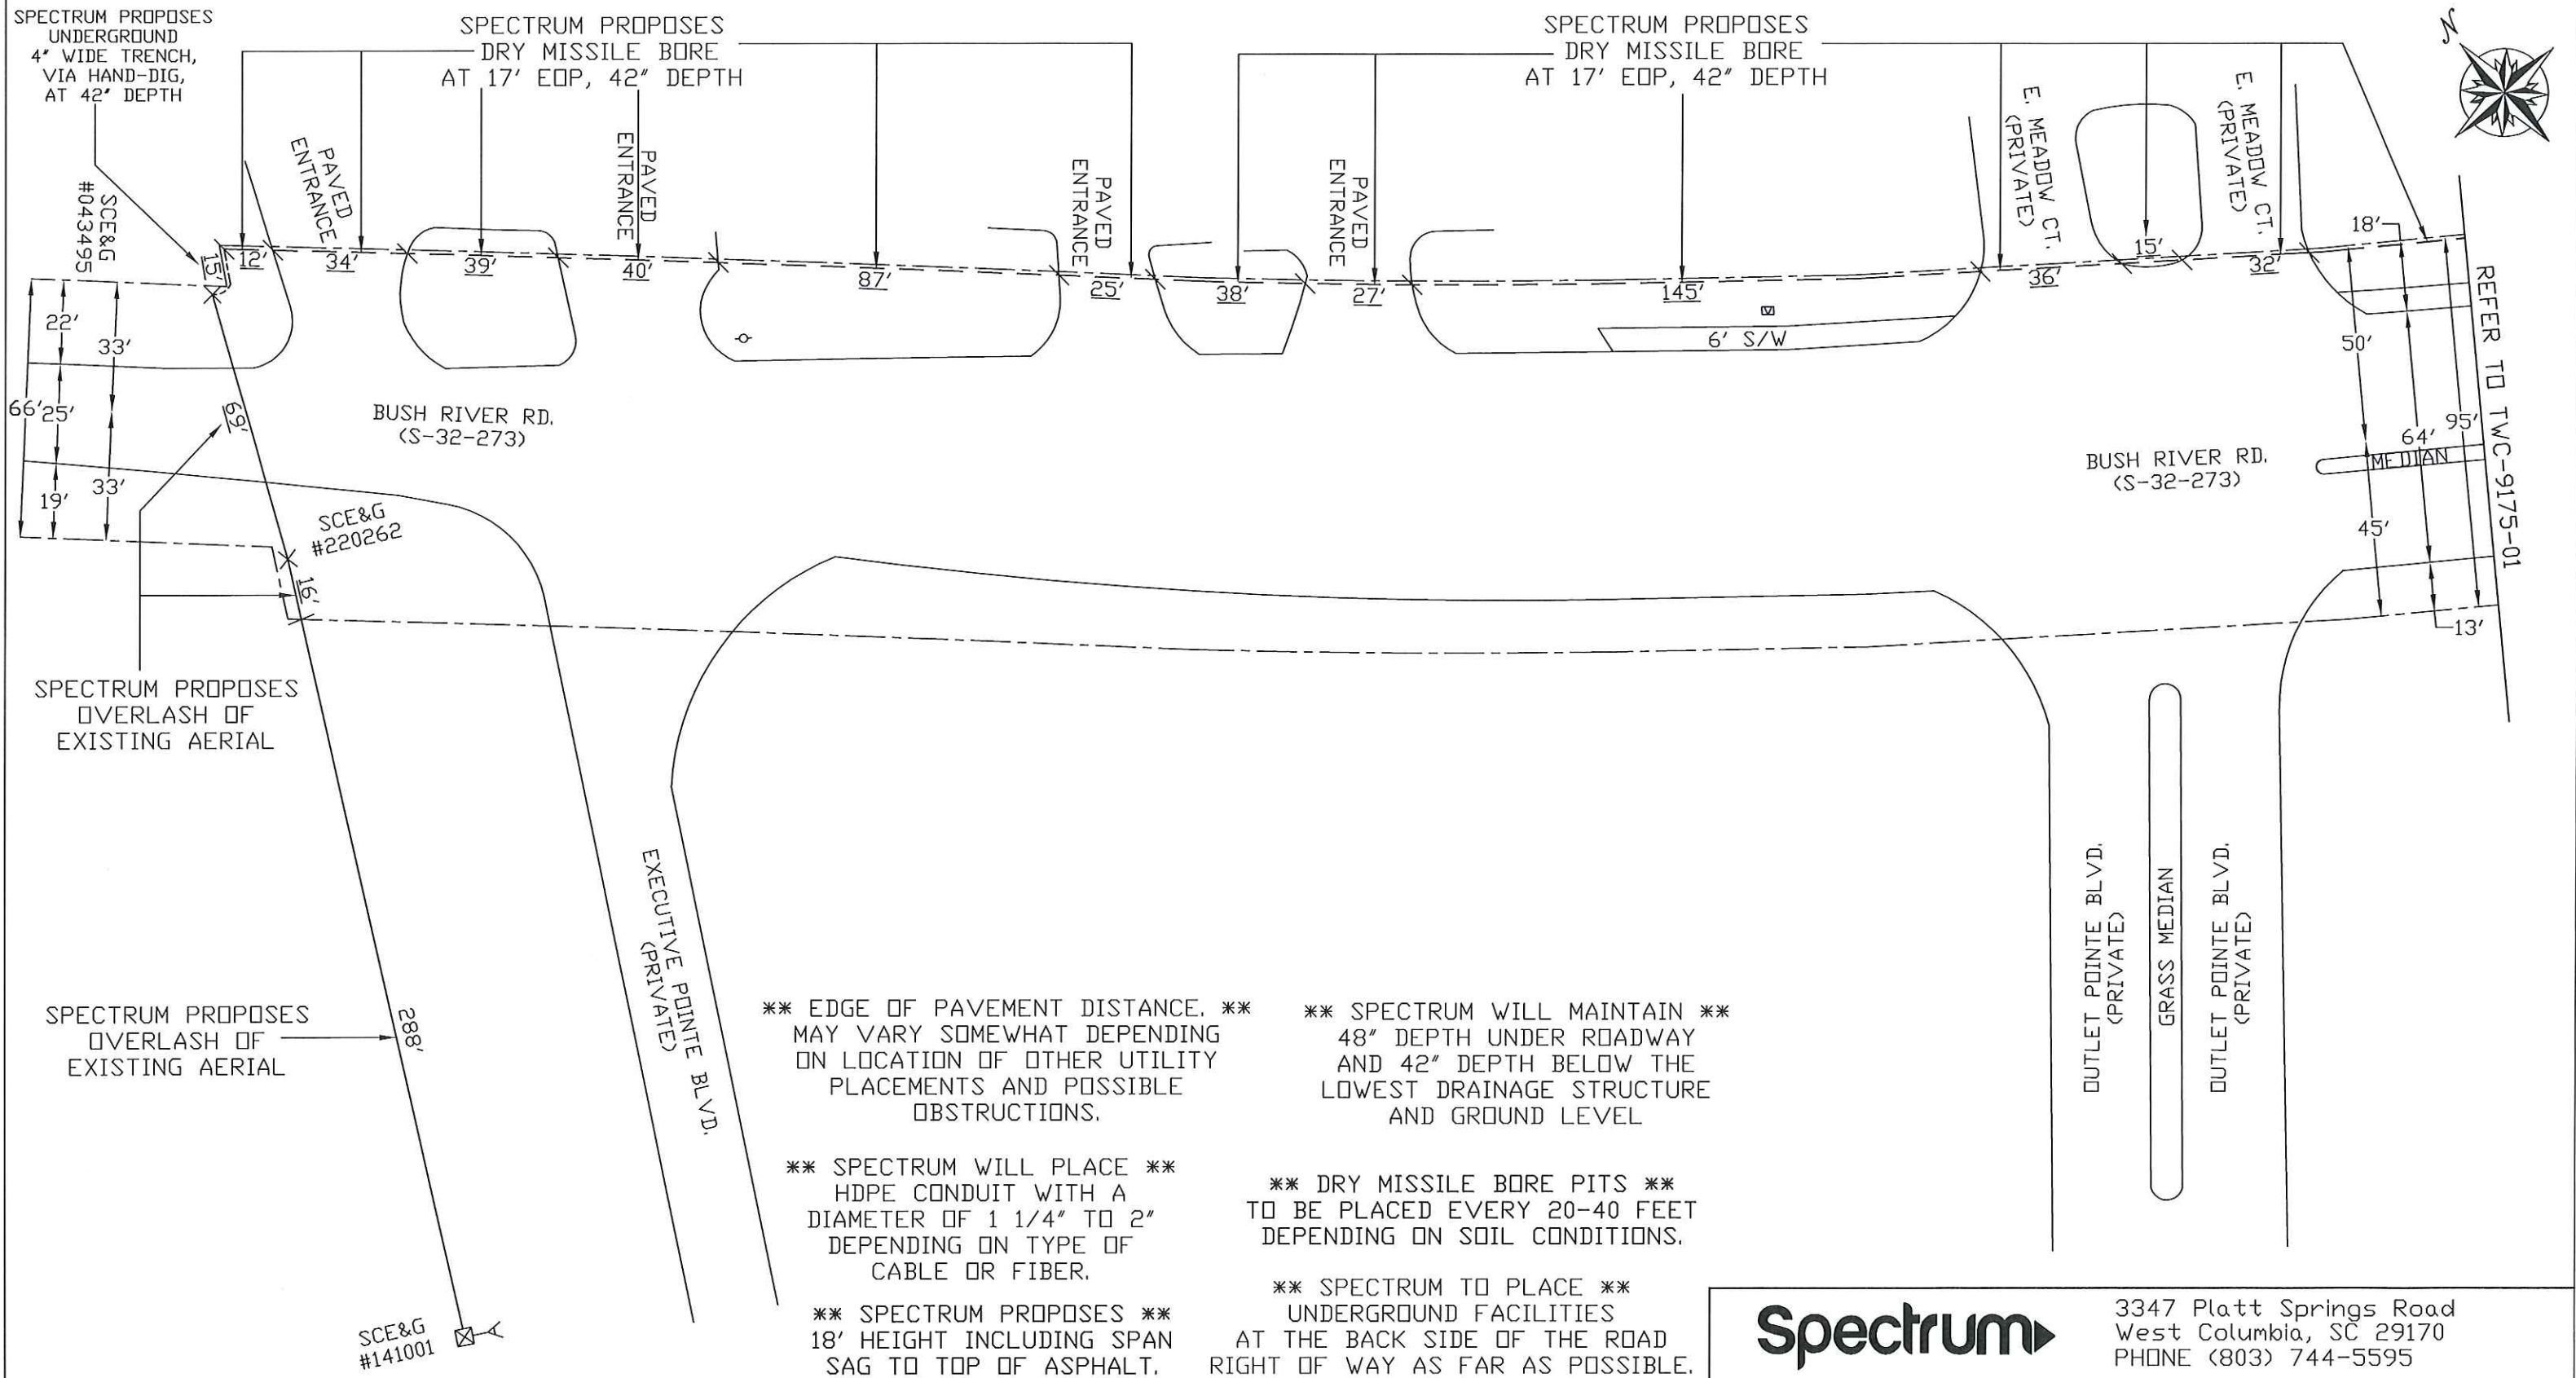

1. Total cable footage is 630 ft. or .119 miles
2. Underground cable to be a minimum of 5' off EDP unless otherwise noted and 3 ft below crossline pipes.
3. Pedestal to be placed at edge of Right-of-Way
4. Bore under all roads
5. Bore pits must be closed immediately after installation
6. Bore pits must be 5 ft. from edge of pavement
7. Shoulder sod destroyed by this installation to be replaced and this entire disturbed area reshaped and rolled to the cross section existing prior to this work.
8. Trench to be properly backfilled and thoroughly tamped.
9. The disturbed area shall be reshaped and dressed out in a workmanship-like manner.
10. The permittee shall be responsible for any and all damages that occur as a direct result of this installation.
11. Permittee shall allow for any embankment areas near road pavement by making sure cable is at all times at least 42" depth under pavement.

** EDGE OF PAVEMENT DISTANCE. **
MAY VARY SOMEWHAT DEPENDING
ON LOCATION OF OTHER UTILITY
PLACEMENTS AND POSSIBLE
OBSTRUCTIONS.

** SPECTRUM WILL PLACE **
HDPE CONDUIT WITH A
DIAMETER OF 1 1/4" TO 2"
DEPENDING ON TYPE OF
CABLE OR FIBER.

** SPECTRUM PROPOSES **
18' HEIGHT INCLUDING SPAN
SAG TO TOP OF ASPHALT.

** SPECTRUM WILL MAINTAIN **
48" DEPTH UNDER ROADWAY
AND 42" DEPTH BELOW THE
LOWEST DRAINAGE STRUCTURE
AND GROUND LEVEL

** DRY MISSILE BORE PITS **
TO BE PLACED EVERY 20-40 FEET
DEPENDING ON SOIL CONDITIONS.

** SPECTRUM TO PLACE **
UNDERGROUND FACILITIES
AT THE BACK SIDE OF THE ROAD
RIGHT OF WAY AS FAR AS POSSIBLE.

LEGEND			
△	PEDESTAL	-----	SCDOT R.O.W.
⊠	VAULT	-----	COUNTY R.O.W.
⊗⊗⊗	UTILITY POLES	~~~~~	DITCH LINE
		⊙	BUSH OR TREE

Spectrum
3347 Platt Springs Road
West Columbia, SC 29170
PHONE (803) 744-5595

SCALE: 1:40	APPROVED BY:	DRAFTED BY: TELICS
113 EXECUTIVE POINTE BLVD COMMERCIAL - MIKE KOWALEWSKI		
LEXINGTON SCDOT STATE ROADS		DRAWING NUMBER TWC-9175-02