



FOR INFORMATION ONLY

|                    |       |                    |            |          |           |
|--------------------|-------|--------------------|------------|----------|-----------|
| FED. ROAD DIV. NO. | STATE | COUNTY             | PROJECT ID | RTE. NO. | SHEET NO. |
| 3                  | S.C.  | LEXINGTON RICHLAND | XX.XXXX    |          |           |

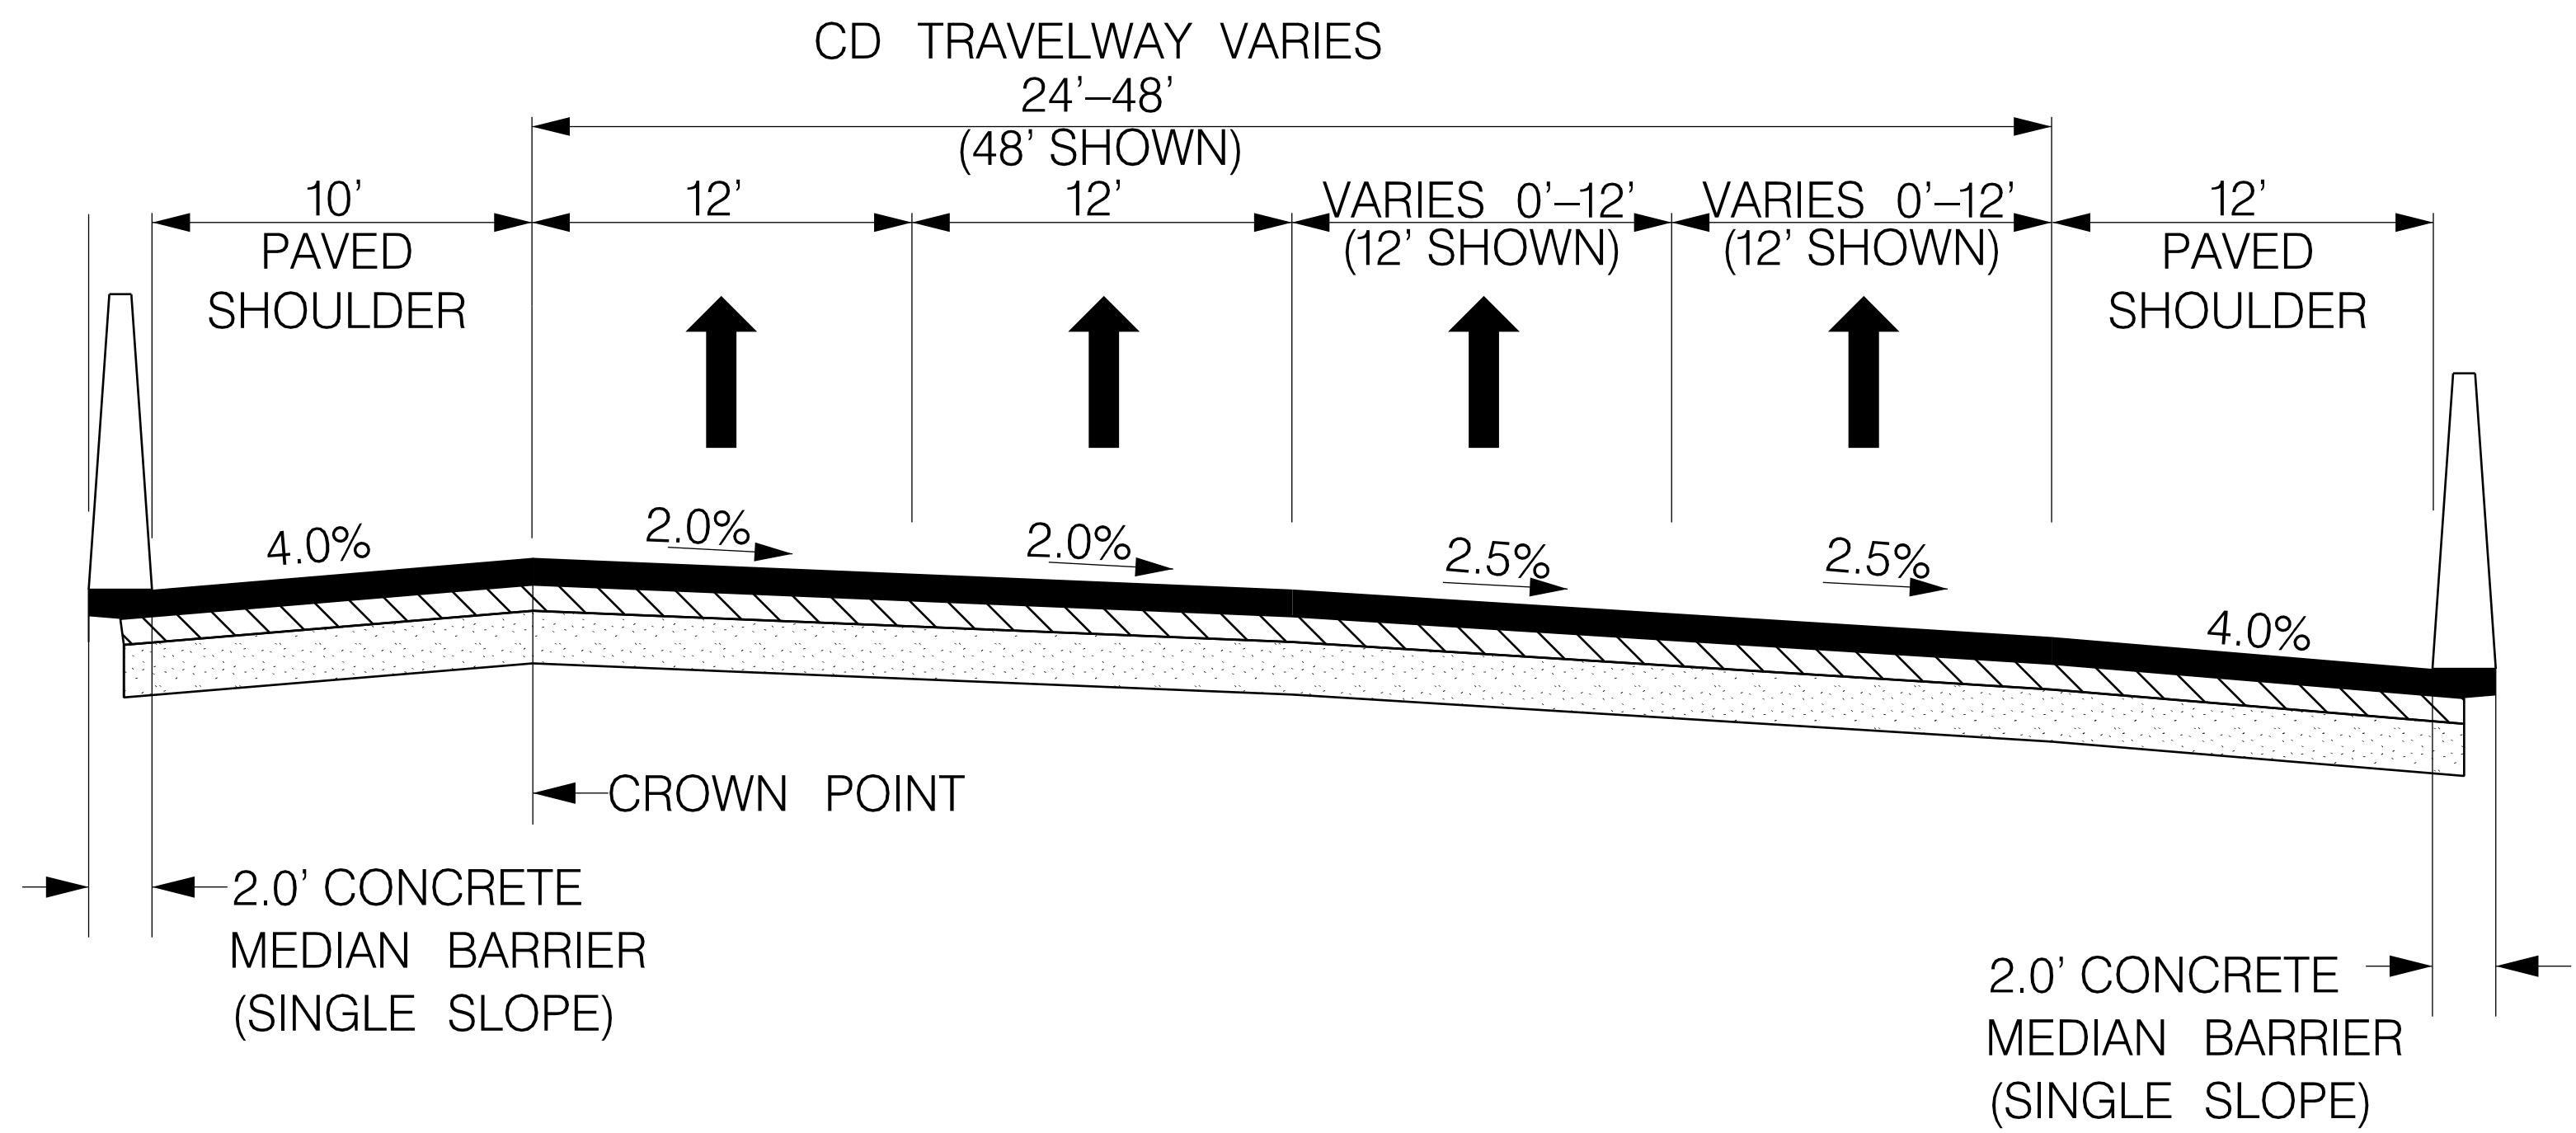

C-D ROADWAY – MULTILANE WITH BARRIER WALL  
FC= URBAN INTERSTATE DS= 50 MPH

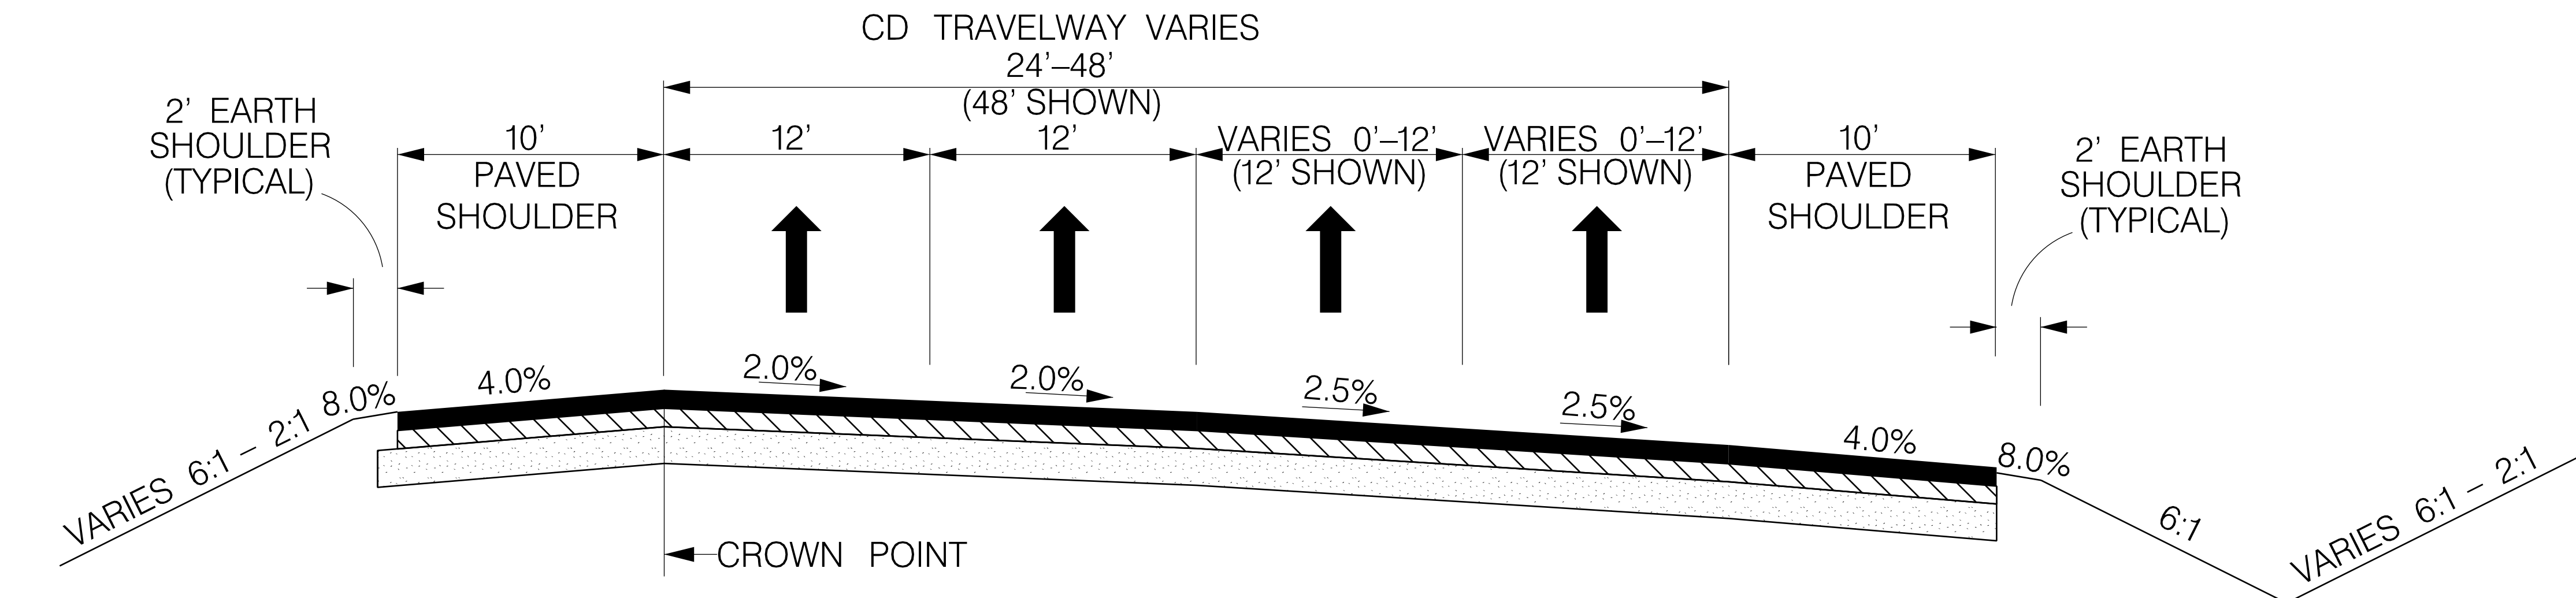

ADD 3.75' TO EARTH SHOULDER WHERE GUARDRAIL IS REQUIRED

C-D ROADWAY – MULTILANE  
FILL/DITCH SECTION  
FC= URBAN INTERSTATE DS= 50 MPH

7/8/2020  
HDR Engineering, Inc. of the Carolinas  
Carolina Crossroads\_Typical Sections\_PREFERRED\_AL.T.dgn

| RTE. | DESIGN SPEED |           | PAVEMENT DESIGN | SOUTH CAROLINA<br>DEPARTMENT OF TRANSPORTATION<br>ROAD DESIGN COLUMBIA, S.C.<br><br><b>CAROLINA CROSSROADS</b><br><b>I-26/I-126/I-20</b><br><b>TYPICAL SECTIONS</b> |
|------|--------------|-----------|-----------------|---|
|      | MPH          | FROM STA. | TO STA.         |   |
|      |              |           |                 |   |
|      |              |           |                 |   |
|      |              |           |                 | APPROVED BY   |
|      |              |           |                 | DATE  |
|      |              |           |                 | SCALE: NTS RTE. DWG. NO.  |